

Panasonic® Electret Condenser Microphone Cartridge

Consists of a high voltage internal electret membrane, metal electrode and a Field Effect Transistor (FET). Doesn't need a high-voltage bias from the outside like ordinary condenser microphones.

Features: Highly efficient electrical specification, pressure type operating principle, low impedance (2.2k Ω), omnidirectional back directivity and a high degree of reliability under adverse shock,

vibration and environmental tests. **Applications:** Telephone and telephone answering devices, tape recorders, intercoms, computer modems, completed microphones for recording, testing and monitoring, hearing aids, sonic controlled toys and sensors and others. All buzzers and microphones are non-washable.







Fig.	Type	Physical Size (mm)	Sensitivity (0dB = 1V/Pa)	Frequency Range (Hz)	Operating Voltage Max./Std.	Current Consumption Max.	Sensitivity Reduction	S/N Ratio	Digi-Key Part No.	Price Each 1	Price Each 10	Price Each 100	Panasonic Part No.
1	Omni-directional	$\phi 6.0 \times 1.3$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11957-ND†	2.83	2.51	2.03	WM-63GCT
2		$\phi 6.0 \times 1.3$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11958-ND†	2.93	2.60	2.10	WM-63GNT
3		$\phi 6.0 \times 1.3$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11961-ND†	3.36	2.99	2.42	WM-63PRT
3	Omni-directional	$\phi 6.0 \times 2.2$	-45dB ± 4 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P9955-ND†	2.05	1.82	1.48	WM-64C
3		$\phi 6.0 \times 2.2$	-45dB ± 4 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P9958-ND†	2.03	1.81	1.46	WM-64K
1		$\phi 6.0 \times 2.2$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11964-ND†	1.99	1.77	1.43	WM-64MCT
1	Omni-directional	$\phi 6.0 \times 2.2$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11965-ND†	2.01	1.79	1.45	WM-64MNT
4		$\phi 6.0 \times 2.2$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11969-ND†	2.74	2.43	1.97	WM-64PNT
5		$\phi 6.0 \times 3.4$	-35dB ± 4 dB	20-20k	10V/2V	0.5mA	within -3dB @ 1.5V	>62dB	P9925-ND	1.83	1.63	1.31	WM-61A
6	Omni-directional	$\phi 6.0 \times 3.4$	-35dB ± 4 dB	20-20k	10V/2V	0.5mA	within -3dB @ 1.5V	>62dB	P11974-ND	2.08	1.85	1.50	WM-61B
7		$\phi 7.7 \times 3.0$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11959-ND	4.78	4.24	3.43	WM-63GNT330
8		$\phi 7.5 \times 2.4$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11960-ND	5.01	4.44	3.59	WM-63GNT335
9	Omni-directional	$\phi 7.7 \times 4.0$	-44dB ± 3 dB	20-16k	10V/2V	0.5mA	within -3dB @ 1.5V	>58dB	P11966-ND	3.76	3.34	2.70	WM-64MNT330A
10		$\phi 9.7 \times 5.0$	-47dB ± 4 dB	100-16k	10V/1.5V	0.5mA	within -3dB @ 1V	>60dB	P9961-ND	2.58	2.30	1.86	WM-55A103
11		$\phi 9.7 \times 5.0$	-50dB ± 3 dB	100-16k	10V/1.5V	0.5mA	within -3dB @ 1V	>60dB	P9963-ND	1.86	1.66	1.34	WM-56A103
11	Noise Canceling	$\phi 9.7 \times 5.0$	-50dB ± 4 dB	100-12k	10V/2V	0.5mA	within -3dB @ 1.5V	>55dB	P9964-ND	2.08	1.85	1.50	WM-65A103
12		$\phi 9.7 \times 5.0$	-54dB ± 4 dB	100-10k	10V/1.5V	0.5mA	within -3dB @ 1V	>58dB	P9897-ND	2.66	2.37	1.91	WM-55D103

† With built-in cap

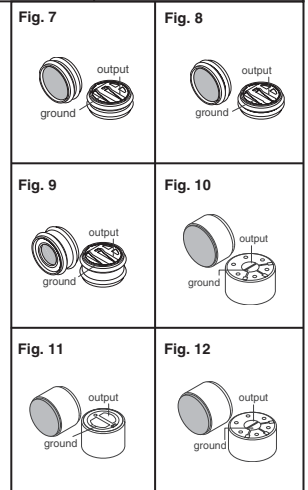

Microphone Holders

Fig.	Digi-Key Part No.	Price Each 1	Price Each 10	Price Each 100	Price Each 500	Panasonic Part No.	Use With Panasonic Part No.
1	P9950-ND	.59	.50	.39	.28	M3CA0208A4	WM-55A103, WM-55D103, WM-56A103
2	P9952-ND	.59	.50	.39	.28	M3CA0207A4	WM-55A103, WM-55D103, WM-56A103

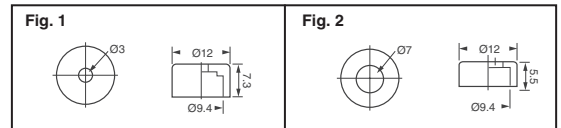


KNOWLES ACOUSTICS Electret Condenser Microphones

Applications: • Headsets • Corded and cordless telephones • PCs, PC tablets, laptops • PDAs, MP3 players • Automotive and automotive accessories • General electronics

Features: • Operating Temperature: -25° ~ 55° C • Highly efficient electrical specifications • Provide good acoustic performance and reliability under typical environmental conditions • Industry standard sizes • Omni, Uni, and Noise Canceling • Integrated RF filtering • Multiple terminations available - Solderless, Pin Type, and PCB

Fig.	Physical Size (mm)	Sensitivity (dB re 1V/Pa)	Freq. Range (Hz)	Standard Operating Voltage	Maximum Operating Voltage	Max. Current Consumption (mA)	S/N Ratio	Built-in Capacitor	Digi-Key Part No.	Price Each 1	Price Each 10	Price Each 100	Knowles Acoustics Part No.
Omnidirectional													
1	$\phi 6.0 \times 2.2$	-42 ± 3	100 - 10K	2.0	10	0.500	>52dB	10pF, 33pF	423-1017-ND	1.62	1.46	1.18	MD6022AS-0
1	$\phi 6.0 \times 2.7$	-42 ± 3	100 - 10K	2.0	10	0.500	>60dB	10pF, 33pF	423-1045-ND	1.62	1.46	1.18	MB6027AS-1
2	$\phi 6.0 \times 3.0$	-38 ± 4	100 - 10K	3.0	10	0.500	>55dB	None	423-1018-ND	1.62	1.46	1.18	MD6030AS-1
3	$\phi 9.7 \times 4.5$	-41 ± 3	100 - 10K	2.0	10	0.500	>55dB	10pF	423-1024-ND	.73	.66	.53	MD9745APE-1
3	$\phi 6.0 \times 2.2$	-40 ± 3	100 - 10K	2.0	10	0.500	>60dB	10pF, 33pF	423-1043-ND	1.91	1.72	1.40	MB6022APE-0
4	$\phi 9.7 \times 4.5$	-44 ± 2	100 - 10K	2.0	10	0.500	>55dB	None	423-1023-ND	.72	.66	.54	MD9745AZ-F
5	$\phi 9.7 \times 6.5$	-42 ± 4	100 - 10K	3.0	10	0.500	>55dB	None	423-1026-ND	.97	.87	.70	MD9765AS-0
9	$\phi 6.0 \times 1.3$	-44 ± 2	100 - 10K	2.0	10	0.500	>60dB	10pF, 33pF	423-1041-ND	2.19	1.98	1.60	MB6013ABE-2
9	$\phi 4.0 \times 1.5$	-42 ± 2	100 - 10K	2.0	10	0.500	>55dB	10pF, 33pF	423-1048-ND	3.47	3.13	3.07	MB4015ABE-1
9	$\phi 4.0 \times 1.5$	-44 ± 2	100 - 10K	2.0	10	0.500	>55dB	10pF, 33pF	423-1049-ND	3.47	3.13	3.07	MB4015ABE-2
10	$\phi 4.0 \times 1.5$	-44 ± 2	100 - 10K	2.0	10	0.500	>55dB	10pF, 33pF	423-1050-ND	4.12	3.71	3.63	MB4015ARC-0 (Poly)
11	$\phi 4.0 \times 1.5$	-44 ± 2	100 - 10K	2.0	10	0.500	>55dB	10pF, 33pF	423-1051-ND	3.79	3.41	3.34	MB4015ARC-2 (Shin)
12	$\phi 4.0 \times 1.5$	-44 ± 3	100 - 10K	2.0	10	0.500	>60dB	10pF, 33pF	423-1052-ND	3.82	3.44	3.37	MB4015ARC-1 (FPC)
13	$\phi 4.0 \times 1.5$	-42 ± 3	100 - 10K	2.0	10	0.500	>55dB	10pF, 33pF	423-1047-ND	3.65	3.29	3.22	MB4015AS-1
Noise Canceling													
2	$\phi 6.0 \times 3.0$	-39 ± 4	300 - 6K	3.0	10	0.500	>55dB	None	423-1019-ND	1.46	1.32	1.07	MD6030NSZ-0
6	$\phi 6.0 \times 3.0$	-37 ± 4	300 - 6K	3.0	10	0.500	>55dB	10pF, 33pF	423-1020-ND	4.28	3.86	3.09	MD6030NSC-0
7	$\phi 9.7 \times 5.2$	-38 ± 3	300 - 6K	3.0	10	0.500	>55dB	None	423-1027-ND	2.36	2.13	1.72	MD9752NSZ-0
8	$\phi 6.0 \times 2.2$	-44 ± 3	100 - 10K	2.0	10	0.500	>60dB	10pF, 33pF	423-1046-ND	1.73	1.56	1.26	MB6022NSC-2R
13	$\phi 4.0 \times 1.5$	-46 ± 3	100 - 10K	2.0	10	0.500	>55dB	10pF, 33pF	423-1053-ND	5.21	4.69	4.59	MB4015NSC-3
Unidirectional													
2	$\phi 6.0 \times 5.2$	-42 ± 3	100 - 10K	2.0	10	0.500	>55dB	None	423-1022-ND	1.83	1.65	1.33	MD6052USZ-1
7	$\phi 9.7 \times 5.5$	-44 ± 2	100 - 10K	1.5	10	0.500	>55dB	None	423-1025-ND	1.65	1.49	1.20	MD9755USZ-1

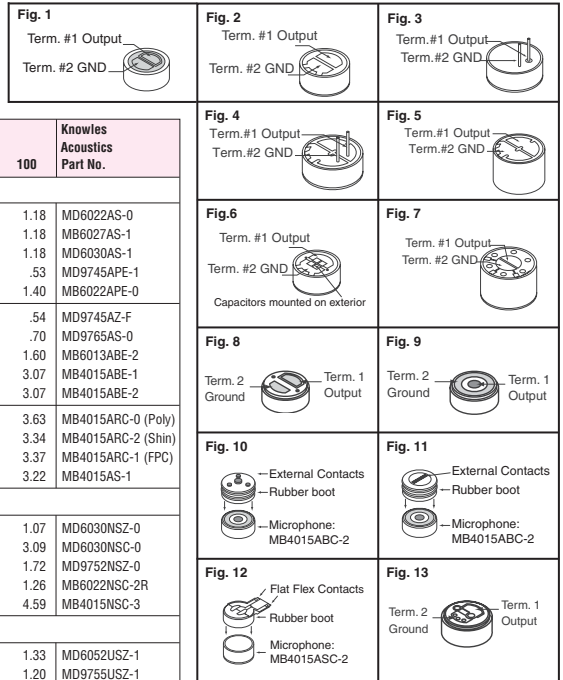

More Product Available Online: www.digikey.com

Toll-Free: 1-800-344-4539 • Phone 218-681-6674 • Fax: 218-681-3380

Omni-Directional Electret Microphones

Dim. in mm.

EA Series: • Integral FET amplifier • Electret condenser microphone • Rugged construction to withstand severe environmental conditions • High resistance to mechanical shock • 3-Wire configuration

EK Series: • Integral FET amplifier • High electroacoustical sensitivity • Low vibration sensitivity • Low noise • 3-Wire configuration

FG Series: • Integral FET amplifier • Wide, flat frequency response • Low noise performance • High electroacoustical sensitivity • 3-Wire configuration

EM Series: • Integral FET amplifier • High electroacoustical sensitivity • Low vibration sensitivity • Low Noise • Small size

WP Series: • Integral FET amplifier • High electroacoustical sensitivity • Low noise • Low vibration sensitivity • Flat response down to very low frequency • Survives submersion in water • 3-Wire configuration

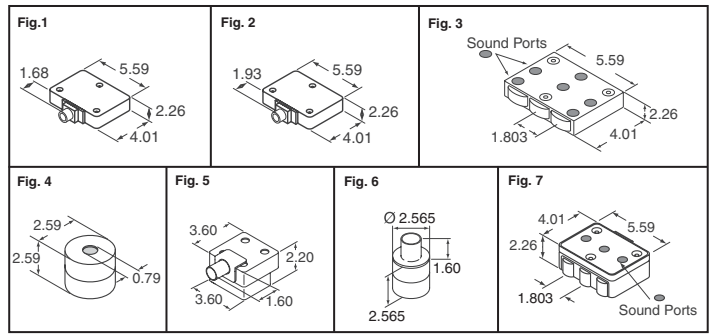


Fig.	Sensitivity @ 1KHz		DC Supply Voltage	Max. Amplifier Current Drain (µA)	Max. "A" Weighted Noise (1KHz Equivalent SPL)	Output Impedance (Ohms)	Digi-Key Part No.	Price Each			Knowles Acoustics Part No.
	(dB re 1V/Pa)	(dB re 1V/0.1 Pa)						1	10	100	
1	-39 ±4	-59 ±4	1.0 - 10	50	28.5 dB	3500	423-1005-ND	19.44	17.52	12.51	EA-1842
	-33 ±3	-53 ±3	1.0 - 10	50	26.0 dB	4400	423-1006-ND	15.62	14.07	10.56	EK-3024
	-33 ±3	-53 ±3	1.0 - 10	50	26.0 dB	4400	423-1007-ND	16.89	15.22	11.46	EK-3027
2	-33 ±3	-53 ±3	1.0 - 10	50	26.0 dB	4400	423-1009-ND	15.60	14.06	12.51	EK-3133
3	-33 ±3	-53 ±3	1.0 - 10	50	26.0 dB	4400	423-1008-ND	18.01	16.23	11.59	EK-3132
4	-33 ±3	-53 ±3	1.0 - 1.6	50	30.0 dB	4400	423-1000-ND	25.25	22.75	16.25	FG-3329
	-33 ±3	—	0.9 - 1.6	50	28.0 dB	4400	423-1063-ND	23.07	20.78	16.38	FG-3629
	-33 ±3	—	0.9 - 1.6	50	28.0 dB	4400	423-1064-ND*	29.56	26.64	19.03	FG-3629-P16
	-43 ±3	—	0.9 - 1.6	50	30.0 dB	4400	423-1067-ND	23.07	20.78	16.38	FG-3742-C05
	-43 ±3	—	0.9 - 1.6	50	30.0 dB	4400	423-1068-ND*	27.45	24.73	19.49	FG-3742-D36
5	-36 ±3	—	0.9 - 10	50	31.0 dB	4400	423-1061-ND	26.98	24.31	17.36	EM-3046
	-36 ±3	—	0.9 - 10	50	31.0 dB	4400	423-1062-ND*	22.98	20.70	16.32	EM-3046-P16
6	-33 ±3	—	0.9 - 1.6	50	28.0 dB	4400	423-1065-ND	23.07	20.78	16.38	FG-3652-C36
	-33 ±3	—	0.9 - 1.6	50	28.0 dB	4400	423-1066-ND*	30.23	27.23	19.45	FG-3652-P16
Waterproof Microphone											
7	-34 ±3	-54 ±3	1.0 - 10	50	28.0 dB	4400	423-1012-ND	25.29	22.79	16.28	WP-3502
	-34 ±3	-54 ±3	1.0 - 10	50	28.0 dB	4400	423-1054-ND*	25.29	22.79	16.28	WP-3502-P16

* Has 1 inch long leads

Noise-Canceling Close Talking Microphones

NR Series: • Integral FET amplifier • Diaphragm responds to pressure differential giving high rejection of background noise • Small size • High electroacoustical sensitivity • Low vibration sensitivity

CF Series: • Integral FET amplifier • Diaphragm responds to pressure differential giving high rejection of background noise • Withstands severe environmental conditions • Sound ports protected by woven mesh treated with water repellent • High resistance to mechanical shock

WP Series: • Integral FET amplifier • Survives submersion in 1m water • Corrosion resistant • Withstands explosive decompression • High resistance to mechanical shock • Small size

Dim. in mm.

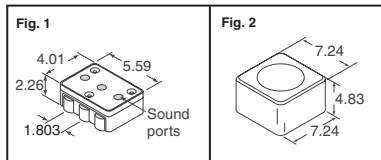


Fig.	Sensitivity @ 1KHz		Microphone Configuration	DC Supply (V)	Max. Amplifier Current Drain (µA)	Nominal Output Imp. (Ohms)	Digi-Key Part No.	Price Each			Knowles Acoustics Part No.
	(dB re 1V/Pa)	(dB re 1V/0.1 Pa)						1	10	100	
1	-32 ±3	-52 ±3	2-Wire	1.0 - 10	200	2500	423-1010-ND	16.86	15.19	11.02	NR-3160
2	-42 ±3	-62 ±3	3-Wire	1.0 - 10	50	3500	423-1014-ND	25.49	22.97	16.41	CF-2949
Waterproof Microphone											
1	-34 ±3	-54 ±3	2-Wire	1.0 - 10	300	2500	423-1011-ND	25.29	22.79	16.28	WP-3501

Piezo Ceramic, Accelerometer, Magnetic Balanced Armature

Dim. in mm.

BL Series: • High sensitivity • Wide frequency range and flat response • Integral FET amplifier • High resistance to mechanical shock • BL-1785 typically used for instrumentation applications • 3-Wire configuration

BU Series: • Ceramic vibration transducer • High vibration sensitivity and small size • Wide frequency range • Internal FET preamplifier • 2 or 3-Wire configuration

BJ Series: • Balanced armature technology • High efficiency, stability and reliability • Self-shielded against external magnetic fields • Small size • Omni-directional • 2-Wire configuration

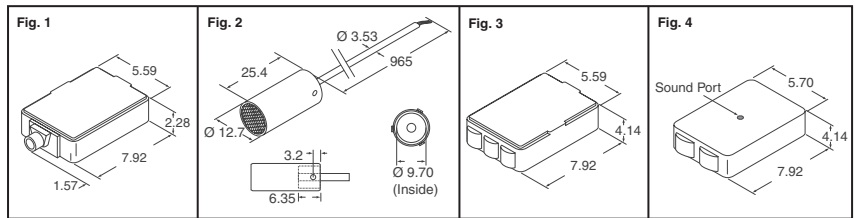


Fig.	Sensitivity @ 1KHz			DC Supply Voltage	Nominal DC Res. (Ohms)	Max. Amplifier Current Drain (µA)	Max. "A" Weighted Noise (1KHz Equivalent SPL)	Output Imp. @ 1KHz (Ohms)	Digi-Key Part No.	Price Each			Knowles Acoustics Part No.
	(dB re 1V/Pa)	(dB re 1V/0.1 Pa)	(dB re 1V/g)							1	10	100	
Piezo Ceramic Microphones													
1	-49 ±3	-69 ±3	—	3.0	—	160	34.0dB	4000	423-1003-ND	72.47	65.29	46.64	BL-1785
2	-49 ±3	-69 ±3	—	3.0	—	160	34.0dB	4000	423-1002-ND	94.84	85.19	67.64	BL-1994
Accelerometer (Vibration-Sensing Transducer)													
3	—	—	-45.0 ±4.5	1.5 - 10	—	50	—	5200	423-1004-ND	51.26	46.18	32.99	BU-1771
Magnetic Balanced Armature													
4	-55.5 ±3	-75.5 ±3	—	—	900	—	—	3900	423-1001-ND	27.82	25.07	17.91	BJ-1590

(Continued)

More Product Available Online: www.digikey.com

Toll-Free: 1-800-344-4539 • Phone 218-681-6674 • Fax: 218-681-3380